



Blind



Threaded



MULTI/JOINT® 3000 Plus

Model: 3207 - Restraint End Cap

- Suitable for all pipe material such as AC, PE, PVC, PVC0, (stainless) steel, grey cast iron and (ductile) cast iron
- NSF 61 approved
- Angular deflection of max. 8° per socket at installation (based on the middle of the coupling range)
- Suitable for water, sewer and wastewater applications
- Ductile Iron body and glands, acc. to ASTM A536 grade 65-45-12 AWWA C153
- Fusion bonded RESICOAT® epoxy powder coating, acc. to AWWA C116, NSF 61
- EPDM gasket, NSF 61
- Stainless steel Uni/Fiksers (gripping teeth)
- Stainless steel AISI 304 bolts (anti galling surface coated), nuts and washers
- Please consult manufacture when installing on PE pipe, pipe stiffener may be required
- All product has end caps or hygiene protected packaging
- Restraint working pressure 232 PSI (2"-12"), 150 PSI (14"-24")


Specifications:

Meets or exceeds standards: AWWA C219-11, NSF 61, NSF 372, AWWA C116/A21.16-15, AWWA C111/A21.11-12, AWWA C153/A21.53-11, ASTM F1476-07[2013]

Engineer

Spec Section	
Paragraph	
Approved	
Date	

Size	Range of coupling (inch)	Length (inch)	Width (inch)	Weight (LBS)
2"	1.811 - 2.795	4.528 - 5.118	6.457	8
2½"	2.480 - 3.543	5.709 - 6.181	7.323	9
3"	3.307 - 4.133	5.591 - 6.142	8.031	11
4"	4.094 - 5.196	5.669 - 6.417	9.291	14
5"	5.196 - 6.102	5.945 - 6.654	10.394	17
6"	6.062 - 7.559	5.866 - 6.969	11.969	21
8"	7.559 - 9.133	7.087 - 8.150	13.937	40
9"	9.050 - 10.551	8.307 - 9.528	15.197	46
10"	10.500 - 12.204	8.425 - 9.803	17.008	60
12"	12.401 - 14.015	8.622 - 10.000	19.291	76
16"	15.433 - 17.047	9.961 - 11.614	22.598	95

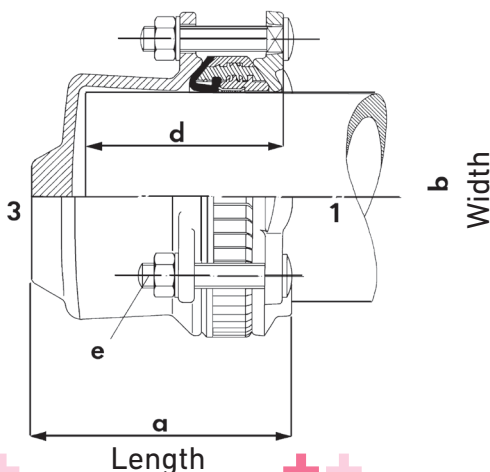

GF Piping Systems

4949 Joseph Hardin Drive
Dallas, TX 75236 - ☎ 972-641-2080
United States

www.gfps.com/us

01-2019