




MULTI/JOINT® 3000 Plus

Model: 3007 - Restraint Coupling

- Suitable for all pipe material such as AC, PE, PVC, PVC0, (stainless) steel, grey cast iron and (ductile) cast iron
- NSF 61 approved
- Angular deflection of max. 8° per socket at installation (based on the middle of the coupling range)
- Suitable for water, sewer and wastewater applications
- Ductile Iron body and glands, acc. to ASTM A536 grade 65-45-12 AWWA C153
- Fusion bonded RESICOAT® epoxy powder coating, acc. to AWWA C116, NSF 61
- EPDM gasket, NSF 61
- Stainless steel Uni/Fiksers (gripping teeth)
- Stainless steel AISI 304 bolts (anti galling surface coated), nuts and washers
- Please consult manufacture when installing on PE pipe, pipe stiffener may be required
- All product has end caps or hygiene protected packaging
- Restraint working pressure 232 PSI (2"-12"), 150 PSI (14"-24")

Submittal and datasheet:

Size	Range of coupling (inch)	Length (inch)	Width (inch)	Weight (LBS)
2"	1.811 - 2.795	8.228 - 9.173	6.457	11
2½"	2.480 - 3.543	8.661 - 9.842	7.323	12
3"	3.307 - 4.133	9.212 - 10.315	8.031	16
4"	4.094 - 5.196	9.055 - 10.551	9.291	21
5"	5.196 - 6.102	9.685 - 11.102	10.394	26
6"	6.062 - 7.559	9.527 - 11.732	11.969	33
8"	7.559 - 9.133	11.693 - 13.819	13.937	63
9"	9.050 - 10.551	13.464 - 15.905	15.197	74
10"	10.500 - 12.204	13.937 - 16.693	17.008	88
12"	12.401 - 14.015	14.016 - 16.771	19.291	114
14"	13.858 - 15.472	19.842 - 23.150	21.024	135
16"	15.433 - 17.047	22.126 - 25.512	22.598	161
17"	17.000 - 18.267	20.866 - 22.834	24.527	202
18"	17.716 - 18.976	20.866 - 22.834	25.236	216
19"	18.937 - 20.196	20.866 - 22.834	26.456	216
20"	19.685 - 20.944	20.866 - 22.834	27.205	234
22"	21.574 - 22.834	20.866 - 22.834	29.094	255
24"	23.818 - 25.078	20.866 - 22.834	31.339	302

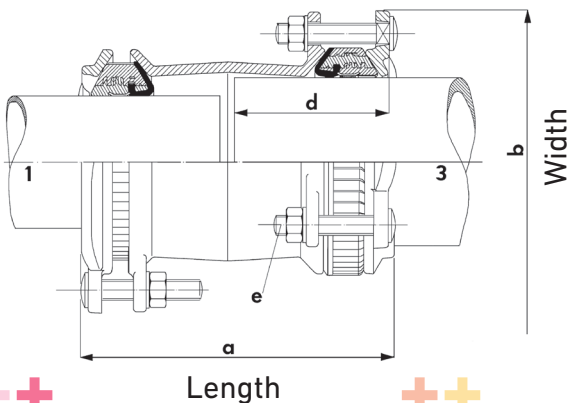

Specifications:

Meets or exceeds standards: AWWA C219-11, NSF 61, NSF 372, AWWA C116/A21.16-15, AWWA C111/A21.11-12, AWWA C153/A21.53-11, ASTM F1476-07(2013)

Engineer

Spec Section	
Paragraph	
Approved	
Date	

GF Piping Systems

4949 Joseph Hardin Drive
Dallas, TX 75236 - ☎ 972-641-2080
United States

www.gfps.com/us

01-2019